

INSTALLATION DETAIL

ROUGH OPENING:

5+27A+5

UNIT IN mm

OUTSIDE

Teza bifold door rough opening requires 1/4" on each side of the bifold door's frame. A 120" x 80" bifold door will use a rough opening of approximately 120 1/2" x 80 1/4" to fit. Always remember to square up your door before you nail the frame in place to assure it will close properly.

ATION DETAIL

TEZA BIFOLD PATIO DOORS ARE IN COMPLIANCE WITH BUILDING CODE (TITLE 24) THAT HAS BEEN TESTED BY 3RD PARTY. CURRENTLY, WE ARE IN THE PROCESS OF GETTING COMPLIANCE WITH

NFRC LAB.

SHGC RATING	U- FACTOR
0.26	0.32


GLASS DETAILS

TITLE 24

- DOUBLE TEMPERED GLASS
- EACH PANE 5MM GLASS
- E GLASS 100% BLOCK UV
- FILLED WITH ARGON GAS
- 5mm GLASS PANE + 27mm ARGON GAS+ 5MM GLASS PANE



BOTTOM TRACK DETAIL

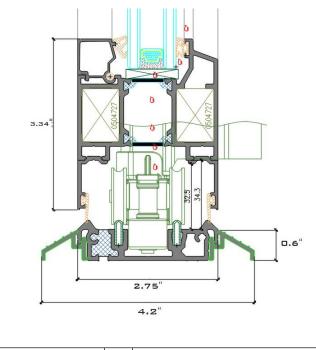

TEZA DOORS

20115 NORDHOFF ST CHATSWORTH, CA 91311 WWW.TEZADOORS.COM CALL: (818) 818-6001 PROJECT

DOOR TYPE

UNIT IN INCH

TEZA 90 SERIES BIFOLD DOOR SPECIFICATION

Notes

- 1. All dimensions are in feet & inches.
- 2. All dimensions are to be checked on site.
- Any discrepancy between the architectural drawing and other drawings relevant for construction should be notified before commencement.