TEZA 120 Series Sliding Window

Explore a world of possibilities with TEZA Doors and Windows, where we don't just open doors, we create entrances to a better living. Welcome home.



TEZA's 120 Series Sliding Windows are customizable to fit any home, allowing you to enjoy the surrounding scenery with durable and smooth operation. These windows add beauty to any home with their narrow, stable aluminum frames, combining functionality with an elegant design.

TEZADOORS.COM

Product Overview

The TEZA 120 Series Sliding Window features a sleek, modern design with smooth sliding operation, ideal for creating larger openings and maximizing views. Built with high-quality aluminum frames and advanced thermal break technology, it provides exceptional insulation, reducing energy consumption and improving comfort. Customizable glass options, such as smart glass and frosted glass, allow for personalized aesthetics and enhanced privacy.

Limitations:

The TEZA 120 Series Sliding Window is available in widths **ranging from 30" to 59" and heights from 31" to 51"**. These specifications are designed to ensure smooth sliding operation and structural integrity. Adhering to these size limits is crucial for optimal performance. Exceeding these dimensions may compromise the window's functionality and longevity.

Energy Efficiency

Glass can be customized with various coatings, including Low E2, Low E4, and clear glass, to enhance privacy, protection, and thermal efficiency. These options let you choose the best fit for your needs, whether maximizing energy savings or improving comfort. The thermally broken aluminum frame adds an insulating barrier that significantly boosts energy performance, maintaining a consistent indoor temperature and reducing energy consumption. By combining customizable glass options with thermally efficient frames, our windows deliver superior performance and long-term benefits for your home or commercial space.

Performance Chart

Frame Material	Aluminum 6063-TS
Frame Thickness	1.72mm DSLS115ZB-02A
U-Factor	0.30
Argon Fill	90%
Solar Heat Gain Coefficient	0.23
Visible Transmittance	0.51
Air Leakage	0.30
Sound Performance	0.30
Wind Load Resistance	77 mph

Inspection Report

No.	Inspection Item	Unit Symbol	Standard Requirement	Inspection Result	Result		
1	Mg	%	0.45-0.9	0.46	Qualified		
2	Si	%	0.20-0.6	0.38	Qualified		
3	Fe	%	≤0.35	0.16	Qualified		
4	Cu	%	≤0.10	0.03	Qualified		
5	Zn	%	≤0.10	0.03	Qualified		
6	Mn	%	≤0.10	0.03	Qualified		
7	Cr	%	≤0.10	0.02	Qualified		
8	Ti	%	≤0.10	0.03	Qualified		

Glass Options

-Clear Glass (1/4"- 5mm)

Clear glass offers transparency and excellent visibility, allowing natural light to flood interior spaces.

-Insulation Glass (Online) (1/4" - 5mm)

This glass integrates low emissivity (low-e) properties directly into its composition, enhancing performance and durability. It provides superior thermal insulation benefits.

-Low-E 2 Glass (Offline) (1/4" - 5mm)

TEZA's Low-E3 Glass is designed to reject solar heat while maintaining visibility and offering exceptional fading protection. It adapts to various climates and blocks 85% of harmful UV rays.

-Low-E 4 Glass (Offline) (1/4" - 5mm)

TEZA Low-E4 Glass offers enhanced light transmittance combined with superior solar control. It reflects heat back into the home in winter and blocks 90% of solar heat. It includes 20% more tint visibility than standard glass.

-Triple Panel Glass (1/4" - 5mm)

Each pane of glass is separated by an air gap, enhancing sound absorption and blocking sound transmission. This design reduces outside noise infiltration into interior spaces.

Glass Type	U-Factor How well a product prevents heat from escaping.	Solar Heat Gain Coefficient How well a product blocks heat caused by sunlight.	Visible Light Transmittance How much visible light comes through a product.	UV Protection How well a product blocks ultraviolet rays.
Insulation Glass (Online)	*****	****	*****	*****
Low-E 2 Glass (Offline)	*****	*****	*****	*****
Low-E 4 Glass (Offline)	****	*****	*****	*****
Triple Panel Glass	****	****	*****	*****

Dual Insulating Glass Construction			Frequency (Hz)																	
		OITC*	100	125	160	200	250	315	400	500	630	800	1000	1250	1600	2000	2500	3150	4000	5000
		Sound Transmission Lo							on Los	ss (bB)										
1" overall- ¼", glass, ½", airspace, ¼" glass	35	30	27	24	29	22	22	25	30	33	35	35	38	40	42	37	37	43	46	49
1" overall- ¼", glass, ½", airspace, ¼" glass	38	31	27	23	28	21	27	29	34	35	37	37	41	43	45	44	39	46	49	52
Triple Insulating Class			Frequency (Hz)																	
Triple Insulating Glass Construction		OITC*	100	125	160	200	250	315	400	500	630	800	1000	1250	1600	2000	2500	3150	4000	5000
Guistingtion		Sound Transmission Loss (dB)																		
1- ¾" overall – ¼" glass, ½" airspace, ¼ "glass, ½"airspace, ¼" glass	39	31	25	22	29	24	25	29	34	37	40	40	43	46	48	47	41	47	52	58
2- ¾" overall – 3/8"glass, ¾" airspace,5/16" , glass ¾" airspace,1/4" glass, 0.60" PVB, ¼" glass	45	35	33	30	34	37	39	43	44	45	46	46	43	41	43	49	55	57	61	65

(818)818-6001

Finishes and Colors


Our finishes come in both in-stock and designer selections, and can be customized to match almost any color. Standard options include Bronze Anodized and Satin Anodized, featuring a Class 1 coating thickness for enhanced smoothness and durability. Our designer colors boast a high-quality paint finish that meets the AAMA-2605 rating, the highest standard for organic finishes.

Color Choice



Grille Options


Sizes	10mm*15.6mm, 35mm*24.5mm, 14.8mm*26mm, 12mm*20mm, 10mm*19mm,10mm*15mm
Style	Full Divided Light, Simulated Divided Light, Convenient Cleaning Options
Permanent Exterior Permanent Interior with Spacer	Full Divided Light An authentic look with full divided light grilles that are permanently applied to the interior and exterior of your patio door with spacer between the glass.
Permanent Exterior Permanent Interior	Simulated Divided Light
Permanent Exterior Removable Interior	Simulated divided light offers permanent grilles on the exterior and interior with no spacer between the glass.
Removable Interior Grille	Convenient Cleaning Options
FineLight Grilles Between the Glass	Removable interior grilles are easy to detach for cleaning. They are installed between the glass panels and come with a contoured profile of either 1" or ³ 4".

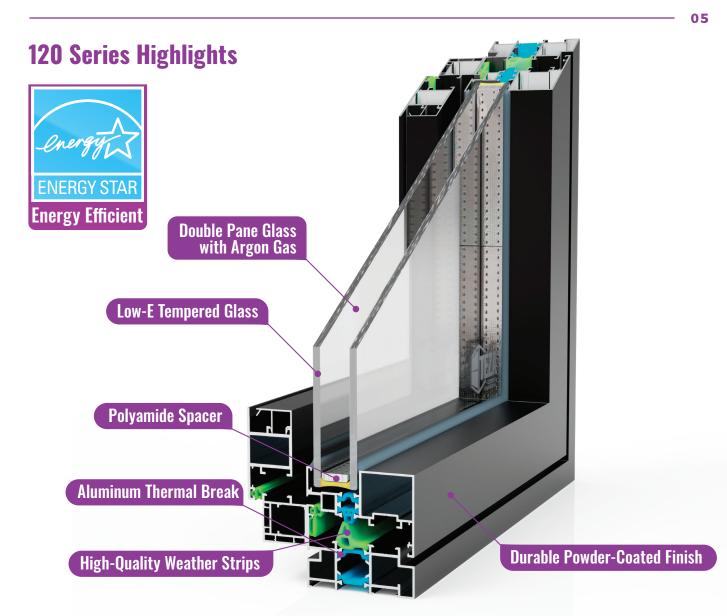

TEZA 120Series Sliding Window Featurs

Feature	TEZA 120 Series Sliding Window				
Design	Smooth Sliding Operation				
Material	High-Quality Aluminum Frame with Thermal Break				
Glass Options	Customizable (Smart Glass, Frosted Glass)				
Insulation	Advanced Thermal Break Technology				
Ventilation	Smooth Sliding for Maximum Airflow				
Minimum Width	30"				
Maximum Width	71″				
Minimum Height	31"				
Maximum Height	51"				


TEZA 120 SERIES SLIDING WINDOW

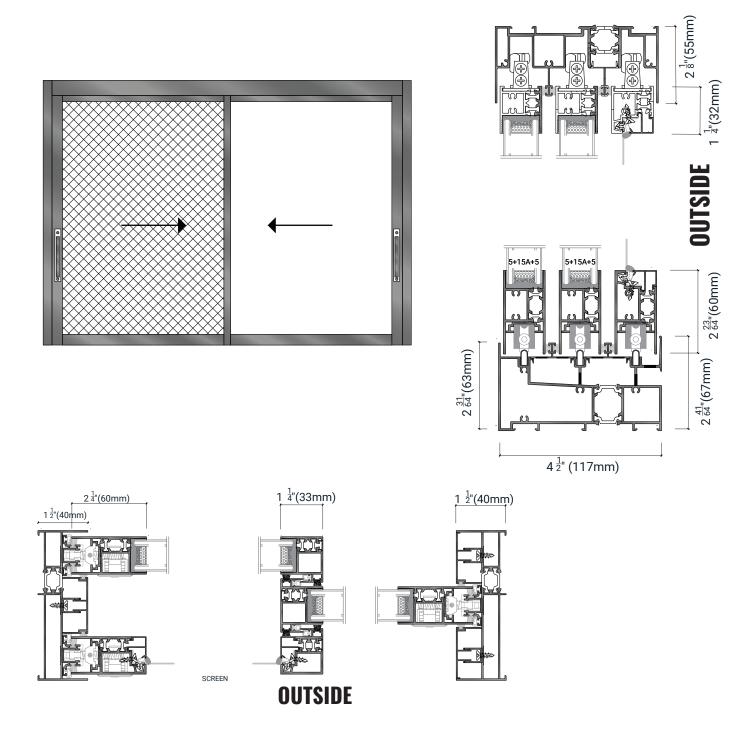

Measurements and Rough Opening

TEZA products sizes behind the frame to frame, and sizes on the invoice will be exact sizes of products. For rough opening requires 1/4" to each

Installation is the sole responsibility of the distributor, user contractor, or their representative.

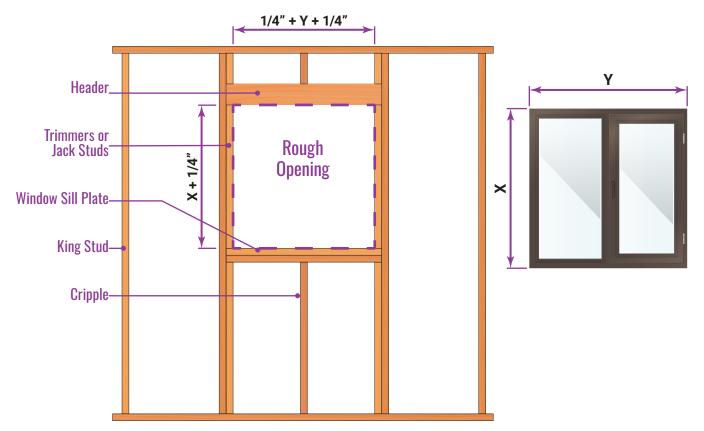

Inspection Report

No.	Inspection Item	Unit Symbol	Standard Requirement	Inspection Result	Result		
1	Mg	%	0.45-0.9	0.46	Qualified		
2	Si	%	0.20-0.6	0.38	Qualified		
3	Fe	%	≤0.35	0.16	Qualified		
4	Cu	%	≤0.10	0.03	Qualified		
5	Zn	%	≤0.10	0.03	Qualified		
6	Mn	%	≤0.10	0.03	Qualified		
7	Cr	%	≤0.10	0.02	Qualified		
8	Ti	%	≤0.10	0.03	Qualified		

Notes

- All TEZA window series flanges are included.
- Flanges are 1" in height and installed with screws.
- For rough opening size, allow a minimum 1/4" gap between the window and rough opening.
- All dimensions are in mm and inches.
- All dimensions are to be checked on site.
- Any discrepancy between the architectural drawing and other drawings relevant for construction should be notified before commencement.
- Sill pans are required by code for doors and windows.



TEZA's aluminum products are exceptionally recyclable. In fact, aluminum is one of the most recyclable materials on the planet, capable of being recycled repeatedly without losing its quality or integrity.













(818)818-6001

sales@Tezadoors.com

www.Tezadoors.com

4943 Telegraph Rd Los Angeles, CA 90022